


KOMPAKT

**6x19 Seale + IWRC, VERDICHTET,
in Anl. an EN 12385-4,
Kreuzschlag, 1960 N/mm²**



Seil-Ø mm	MBK kN	Gewicht/100 m kg
6,00	34,2	19,6
7,00	44,7	25,6
8,00	56,5	32,4
9,00	76,9	44,1
10,00	92,3	52,9
11,00	109	62,5
12,00	127	72,9
13,00	147	84,1
14,00	168	96,1
15,00	179	102,4
16,00	226	130,0
18,00	279	160,0
20,00	338	194,0
22,00	402	237,0



GRIZZLY

**6x25 Filler +IWRC, VERDICHTET,
in Anl. an EN 12385-4,
Kreuzschlag, 1960 N/mm²**


Seil-Ø mm	MBK kN	Gewicht/100 m kg
8,00	56,5	32,4
9,00	76,9	44,1
10,00	92,3	52,9
11,00	109	62,5
12,00	127	72,9
13,00	147	84,1
14,00	168	96,1
15,00	179	102,4
16,00	226	130,0
18,00	279	160,0

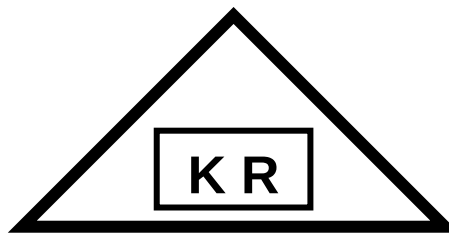

KOMPAKT-PREMIUM

6x19 Seale + IWRC, VERDICHTET,
in Anl. an EN 12385-4,
Kreuzschlag, 2160 N/mm²

Seil-Ø mm	MBK kN	Gewicht/100 m kg
8,00	71,3	36,1
9,00	87,1	44,1
10,00	104,4	52,9
11,00	123,4	62,5
12,00	143,9	72,9
13,00	166,0	84,1



GRIZZLY-PREMIUM

6x25 Filler +IWRC, VERDICHTET,
in Anl. an EN 12385-4,
Kreuzschlag, 2160 N/mm²

Seil-Ø mm	MBK kN	Gewicht/100 m kg
8,00	71,3	36,1
9,00	87,1	44,1
10,00	104,4	52,9
11,00	123,4	62,5
12,00	143,9	72,9
13,00	166,0	84,1